


## Conventional Smoke Detector AW-CSD381





Model No. :	AW-CSD381	Features
Connection type:	2 Wire	
Work voltage :	9 to 28 VDC	♦ Photo-Electric type spot detector
Alarm current :	$\leq 15 \text{ mA}@24 \text{ VDC}$	♦ Built in dual LEDs
Standby current:	$\leq 120 \ \mu A@24 \ VDC$	$\diamond$ Visible from all around 360°
Sensitivity :	0.1 - 0.15 dB/m	♦ Remote indicator output
Dimensions:	99.45 Dia & 48.2 mm High	$\diamond$ Compatible with most brands fire alarm panels.
Work temperature :	-10 °C to 50 °C	$\diamond$ LPCB approved.
Work humidity :	≤95% RH	
Standards:	EN 54-7 : 2018	

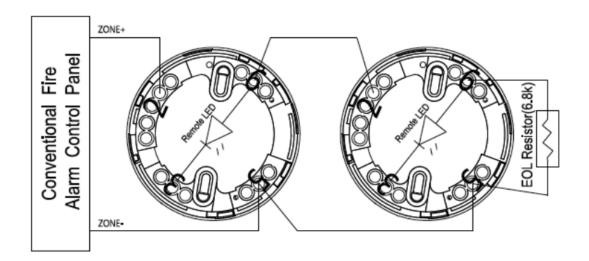

Wire diagram

## Manufacturer:

**Zhongshan Guta Fire Equipment Technology Co.,Ltd** 4/F, #10, Xingye Rd., Huoju District,Zhongshan City, Guangdong, China. www.asenware.com / www.guta-fire.com